

Rec'd PCT/PTO 23 FEB 2005

GB 2003 / 003164

#2



INVESTOR IN PEOPLE

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 800

REC'D 04 SEP 2003

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 14 August 2003

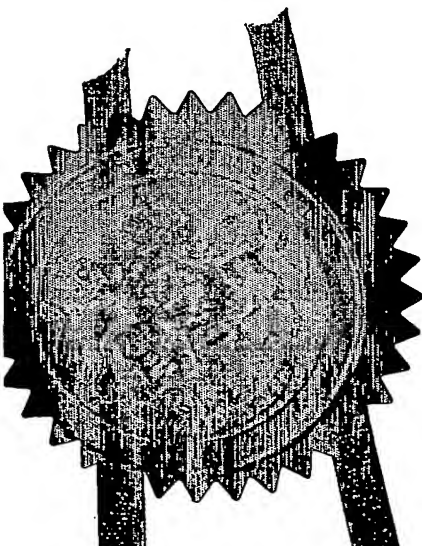

The Patent Office



Cancelled

02-E745331-3 002835
P01/7700 0.00-0220395.8

Request for grant of a patent

(see the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales NP10 8QQ

1. Your reference

PRW/P201255

2. *number*

0220395.8

3 SEP 2002

3. Full name, address and postcode of the applicant (*underline all surnames*)

Aflex Hose Ltd.
Spring Bank Industrial Estate
Watson Mill Lane
Sowerby Bridge
Halifax, HX6 3BW

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

GB

6355200002

4. Title of the invention

END FITTING FOR HOSE

5. Name of your agent (*if you have one*)

URQUHART-DYKES & LORD

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

Tower House
Merrion Way
Leeds LS2 8PA
United Kingdom

Patents ADP number (*if you know it*)

1644004 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country	Priority application number (<i>if you know it</i>)	Date of filing (<i>day/month/year</i>)
---------	--	---

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (<i>day/month/year</i>)
-------------------------------	---

8. Is a statement of Inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
See note (d))

Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description	6
Claim(s)	DM
Abstract	-
Drawing(s)	4 + 4

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of Inventorship and right to grant of a patent (Patents Form 7/77)	-
Request for preliminary examination and search (Patents Form 9/77)	-
Request for substantive examination (Patents Form 10/77)	-
Any other documents (Please specify)	-

11. I/We request the grant of a patent on the basis of this application.

Signature

URQUHART DYKES & LORD

Date

2 September 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

P R WHARTON - 0113 245 2388

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

END FITTING FOR HOSE

The present invention relates to a method of securing an end fitting to a flexible hose or pipe, in particular a plastic hose, and to an assembly comprising a plastic lined hose having an end fitting secured thereto.

The type of end fitting to which this invention relates primarily, though not exclusively, is that known as "Triclover", "Triclamp" or "clamp type" as defined by British Standard BS 4825 Part 3. This type of end fitting is widely used in biochemical process plants and laboratories where the ultimate in hygienic operation is required.

Conventionally, an end fitting of this type would be secured to the end of a pipe or hose to provide a means of connection to other pipes and hoses. One way in which this is currently done is to insert an end fitting within the hose end and align it with an identical end fitting, clamping the two components together with a rubber seal located between the sealing faces of the two end fittings. This rubber seal conventionally includes annular "beads" on each face which seat within corresponding machined grooves in the steel end fittings, these beads providing an aid to concentric location during assembly. This system has the disadvantage that the fitting creates an entrapment zone for fluid passing through the fitting, such as renders hygienic operation impossible. See Figure 1 of the accompanying drawings.

It is also known to attach such an end fitting to say a fluorocarbon or PTFE plastic lined hose in such a way that the plastic liner is passed through the bore of the fitting, then flared out to form a sealing face, thus ensuring continuity of hygienic fluid flow through the fitting, and to protect the fitting from any corrosive effect the fluid may have on the material from which the fitting itself is made. See Figure 2 of the accompanying drawings.

However, there is a disadvantage in this second type of procedure in that, because it eliminates the rubber seal and hence the "beads", concentric connection of the two end fittings is relatively difficult and also requires a much greater clamping force for form a seal with the fluorocarbon plastic sealing face than would otherwise be required with a softer, more resilient, rubber seal. The clamping system used conventionally is not designed to provide such a high clamping

force. Also, an entrapment zone is created at the point where the PTFE liner goes around the corner of the end fitting into the flared sealing face.

Our European patent publication number EP 0707170 disclosed a system which is easily aligned concentrically and which can be sealed effectively using conventional clamping techniques. Furthermore, this system eliminates entrapment zones. See Figure 3 of the accompanying drawings.

The latter system suffered from the disadvantage, however, that a rubber seal was still required to form a seal, so that any fluid passing through which was not compatible with rubber would create problems.

It is not practical to substitute a rubber seal with a PTFE seal (which has much better chemical resistance) since this design of seal is very expensive, not readily available, and notoriously unreliable in service.

The aim of the present invention, therefore, is to provide a Triclover end fitting design attached to a PTFE lined hose which overcomes the problems referred to above.

According to a first aspect of the present invention there is provided a method of securing an end fitting to an end of a hose having an outer braid and a plastic liner, the method including the steps of:-

- i) providing a hollow end fitting for a hose, the end fitting having a spigot and a sealing face;
- ii) inserting the spigot of the end fitting between the braid and the liner and bring the liner end through said hollow end fitting and flaring out the liner end to form a plastic sealing face;
- iii) processing the assembly so formed in such a manner as to cause the flared liner end to form a shape which includes a bead on the liner surface and which has its inside edge squared off.

The bead is preferably concentric and allows the rubber seal previously used to be dispensed with.

The face of the end fitting may or may not have a bead machined in it as described more fully hereinafter.

This end fitting preferably comprises a PTFE lined end fitting, in which the PTFE hose liner is passed through the bore of the end fitting, and is then flared out.

This flared out portion may then be hot formed, e.g. by pressing with a heated tool, in order to form a shape which includes a "bead" of PTFE, and has the inside edge squared off. This bead can be either formed with or without a corresponding bead machined in to the face of the steel.

The differences of the fitting of the invention over that disclosed in our above mentioned European patent are:-

1. the steel flange behind the PTFE is thicker by the thickness of the rubber seal, so as to produce an overall thickness of fitting in which the rubber seal is no longer required; and
2. the hot forming produces a bead, instead of a pocket for the bead on the rubber seal to sit in.

Thus, the end fitting (typically a steel end fitting) applied in accordance with the invention may be located concentrically with a standard conventional end fitting having a similar groove in its sealing face without using a conventional resilient rubber seal having annular beads on each sealing face which are received within the annular grooves in the plastic liner and the sealing face of the conventional end fitting respectively. The two end fittings may then be clamped together to form a sealed connection.

The processing step also preferably results in the liner assuming a square internal corner where it goes into the flared sealing face, thus avoiding any entrapment zone.

Conveniently, the processing step (iii) recited above is a hot coining process which causes the plastic liner to assume the shape of the rubber seal.

The clamping system used would typically be a clamp ring which presses the two end fittings together.

According to a second aspect of the present invention, there is provided a plastic lined hose having secured to an end thereof a hollow end fitting having a spigot and a sealing face, wherein the spigot is located between the braid and the liner, and the liner end passes through the end fitting and is flared out to form a plastic sealing face overlying the sealing face of the end fitting to form a shape which includes a bead on the liner surface and which has its inside edge squared off.

The hot-formed face of the of the seal includes a bead to ensure concentric location of the jointed component, and provides a squared-off inside edge to eliminate an entrapment zone. Also, because the sealing surface of PTFE has been hot-formed flat and smooth, it has been discovered that the clamping force needed to make an effective seal against internal pressure is much lower, and is within acceptable limits required by users who are used to the clamping forces necessary for rubber seals.

Another advantage of the invention over any design which incorporates a seal, whether rubber or PTFE, is that there is only one sealing surface, not two, thereby halving the opportunities for leakage.

The invention will be described further, by way of example, with reference to the accompanying drawings, in which:

Figure 1 illustrates a conventional method of attaching a hose with an end fitting to a pipe with a conventional end fitting;

Figure 2 illustrates a different conventional method of attaching a hose with a plastic lined and flared end fitting to a pipe with a conventional end fitting;

Figure 3 illustrates an end fitting and method of securing the same in accordance with European Patent publication no. 0707170; and

Figures 4a and 4b are similar views to Figure 3 showing two embodiments of the method and joint of the present invention.

Referring to the drawings, and in particular Figure 1, an end fitting 10 is conventionally applied to the end of a hose 12 (which may comprise an outer layer 12a, normally comprising a braid, and an inner layer 12b), by inserting the spigot end 10a inside the liner 12b and clamping the end fitting 10 to another end fitting 14 using a clamp ring 16 to press the two seal faces 10b, 14b together against a rubber seal 15. The seal 15 has two annular beads 15b extending outwardly from the seal faces, and these two beads 15b are received inside grooves 10c, 14c in the respective end fittings, thus acting as a guide to concentric alignment. This arrangement creates an entrapment zone 17 between the liner 12b and the end of the spigot 10a, in which debris may collect.

Turning now to Figure 2, an arrangement known as a "flared plastic lined end" is illustrated, in which the liner 12b is pulled through the hollow end fitting 10 and flared out to form a seal between the two faces 10b, 14b of the two end fittings. This seal can then be clamped, again using a clamp ring 16. This avoids the entrapment zone problem with the construction shown above, but is difficult to align correctly and to clamp using the conventional clamp ring 16 owing to the higher sealing force required. Also, another entrapment zone 17 is created between the liner 12b and the sealing face 14b of the mating end fitting 14.

The construction illustrated in Figure 3 overcomes the above difficulties by providing a modified end fitting 20 in which the whole of the sealing face of the end fitting is machined back, and the groove 20c re-formed or enlarged. The flared end of the plastic liner 13b is then "hot coined" to cause it to mould itself into and assume the shape of the underlying recess face of the end fitting 20, including the groove 20c.

Thus, the face of the end fitting 20 is still lined with plastic material, for example, PTFE, as with the prior embodiment illustrated in Figure 2, but also includes in that lined face a groove

13c formed in the liner 13b to receive the annular bead of a rubber seal 22. Thus, the end fitting 20 can be clamped to a conventional end fitting 14 using a conventional clamp ring 16 and conventional rubber seal 22.

Turning now to Figure 4a and using like numbers for like parts, the hose and seal arrangement in accordance with the invention is illustrated, in which the end face 10b of the end fitting 10 is machined with a concentric bead 24 machined therein. The liner 12b is pulled through the hollow end fitting 10 as before and flared out. The flared out portion is then hot formed by pressing with a heated tool in order to form a shape which includes a bead 26 of PTFE, and has the inside edge 28 squared off. The outer layer 12a, being a braid reinforcement, is passed over the top of the spigot 10a and locked thereto by crimping an external ferrule 30 radially inwards to squeeze and hold the braid permanently to the spigot.

The end fitting 10 is modified in that the steel flange behind the PTFE 15 is thicker by the thickness of the rubber seal which would otherwise be provided so as to produce an overall thickness of fitting in which the rubber seal is no longer required. The bead 26 takes the place of the bead of the rubber seal 15.

Turning now to Figure 4b, the construction of this embodiment is identical, except that the machined bead 24 is omitted, the surface 10b being flat. This therefore means that the PTFE bead 26 is solid rather than hollow as in the construction of Figure 4a.

The end fitting of the invention provides a simple, inexpensive and effective way of producing a seal with a PTFE lined pipe fitting wherein entrapment zones are eliminated and the clamping forces required are not excessive.

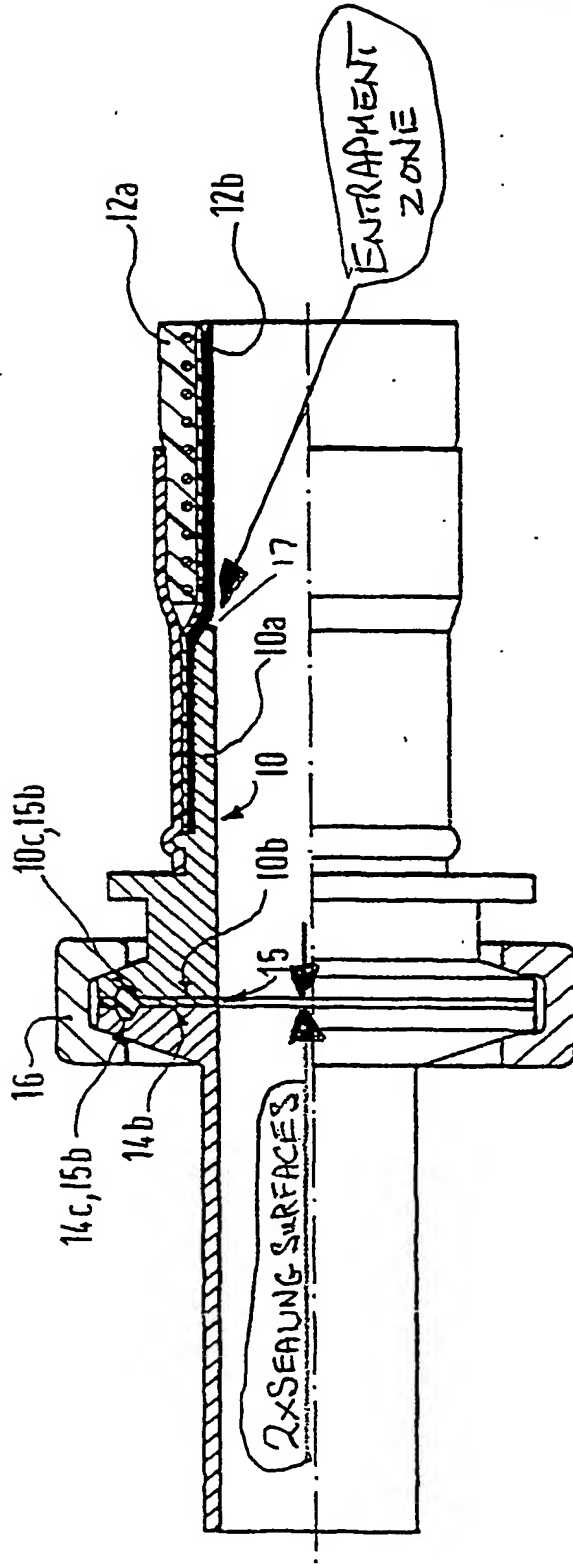


FIG. 1.

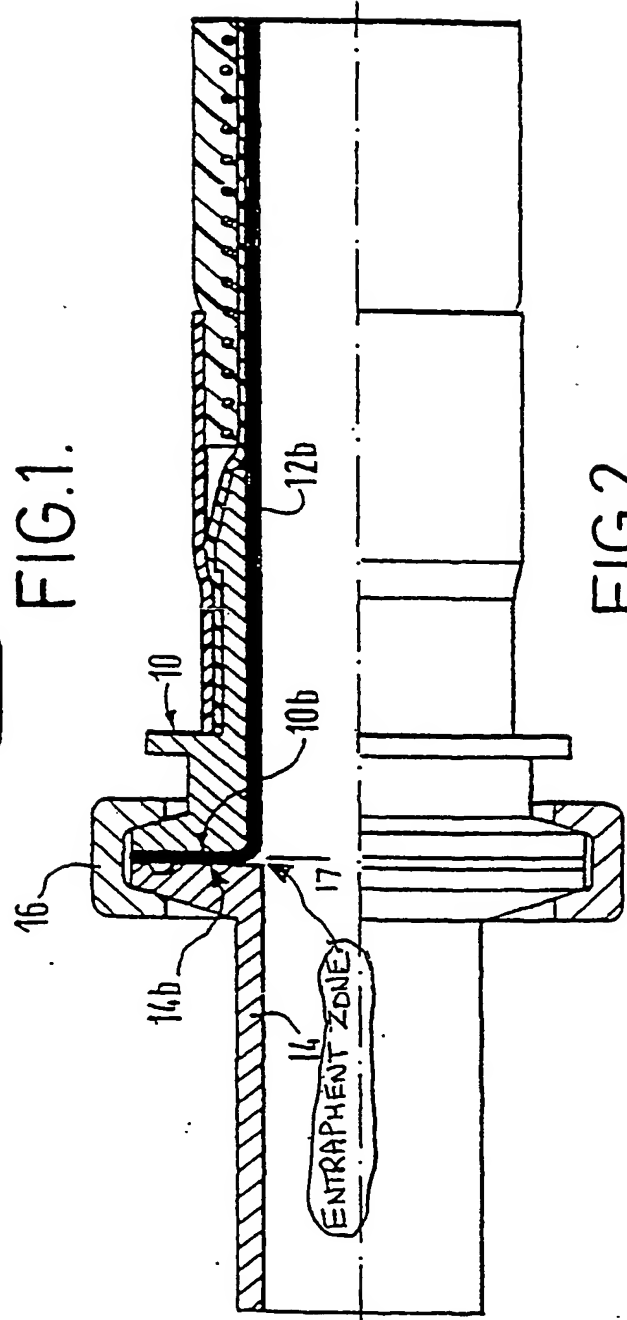


FIG. 2.

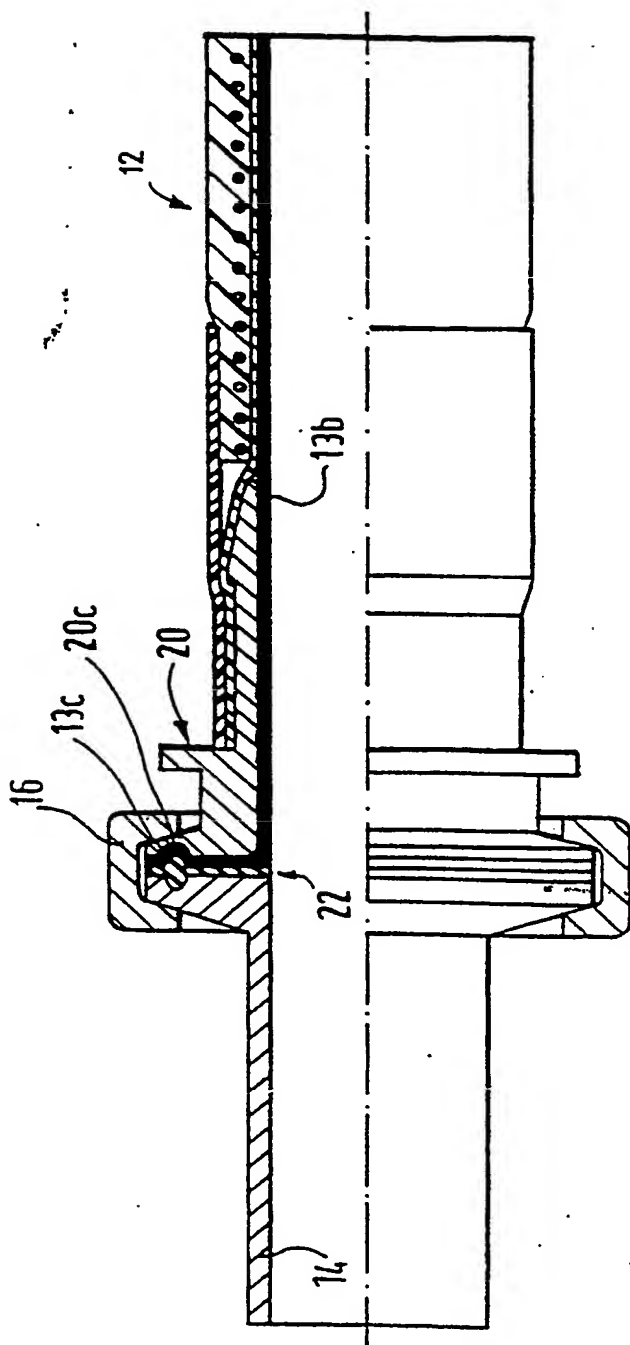


FIG. 3.

DRAWING NO:-
SK090902-DM-1

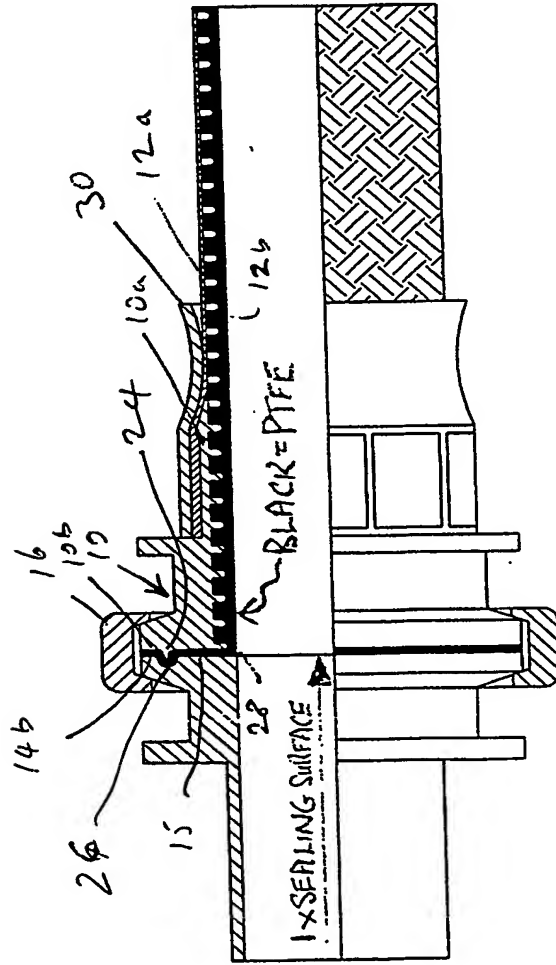


FIG 4a

TITLE :	REV.	DATE.	SIGNATURE	CHECK	FINISH:- MACHINE FINISH ALL OVER TO 0.8µm	REV	HISTORY	SCALE:-	DIMENSIONS	
	0	9.8.02	D.MORTON					N.T.S	MM	
AFLEX HOSE LIMITED								DRAWING NO:-		
NOTES: This drawing is confidential and must not be used, copied, or disclosed, to any third party without prior written consent from Aflex Hose Ltd. Ltd after drawing copies are to be returned to Aflex Hose Ltd.								SKETCH		
					MATERIAL:-				COPYRIGHT AFLEX HOSE LTD.	

DRAWING NO:-
SK090902-DM

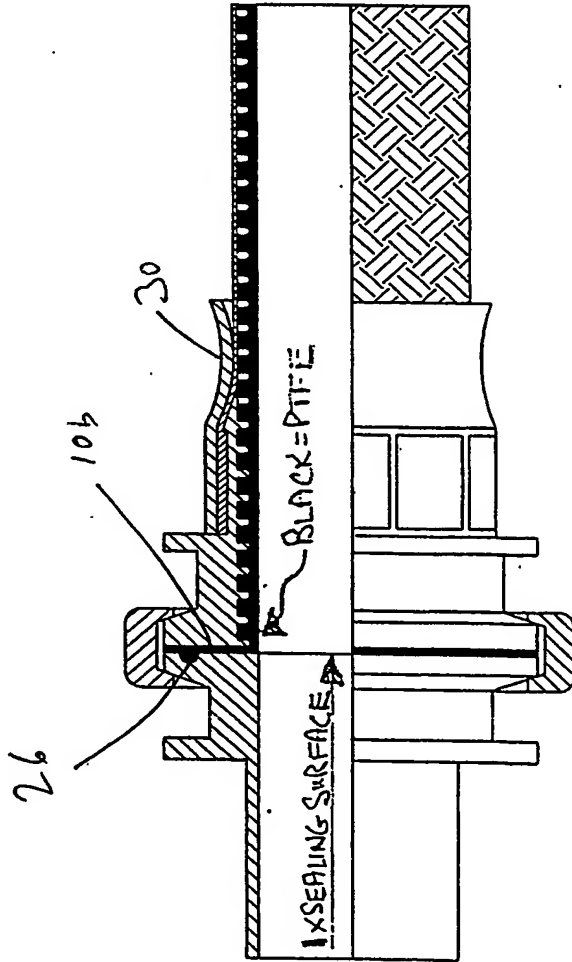


FIG 46

TITLE :		REV.	DATE.	SIGNATURE	CHECK	FINISH:-	HISTORY	SCALE:-	DIMENSIONS
50.5 TRICLOVER "MALE" TYPE 1		0	9.8.02	D.MORTON					
AFLEX HOSE LIMITED						MACHINE FINISH ALL OVER TO 0.8µm		DRAWING NO:-	
							SKETCH		
NOTE: This drawing is confidential and must not be reproduced, copied, or disclosed, in any form, without prior approval from AFLEX HOSE LTD. Drawing copies are to be returned to A.H. Ltd after completion of orders.		MATERIAL:-		TOLERANCE:-		REMOVE ALL SHARP EDGES AND BURRS.			
									COPYRIGHT AFLEX HOSE LTD.

NOTE: This drawing is confidential and must not be used, copied or reproduced without prior written consent from Aflex Hose Ltd. All drawing copies are to be returned to A.H. Ltd after completion of orders.